



FDX-S Output Board FDX-SOV4UHS

The FDX-SOV4UHS is an HDCP 2.2-compliant four-output HDMI board designed for FDX-S Modular Matrix Switchers. The board includes a scan converter that supports resolutions up to 4K@60 and switches input video signals fast.

The Lip Sync feature provides the user with a means to control time alignment between the video and audio.

■ Specification

Item		Description
The number of outputs		4
Input	Video	Format VGA to 4K (Dot clock: 25 MHz to 600 MHz) 480p / 576p / 720p / 1080i / 1080p / 4K For 4K formats, 24 Hz / 25 Hz / 30 Hz / 50 Hz (4:4:4) / 60 Hz (4:4:4) are supported.
	Audio	Digital Multi-channel LPCM up to 8 channels Sampling frequency: 32 kHz to 192 kHz, Sample size: 16 bit to 24 bit Reference level: -20 dBFS, Max. input level: 0 dBFS
Output	Video	HDMI/DVI HDMI/DVI 1.0 TMDS single link, HDCP 1.4/2.2 TMDS clock: 25.175 MHz to 297 MHz, TMDS data rate: 0.755 Gbps to 17.82 Gbps 30 bit Deep Color For 4K@50/59.94 RGB/YCbCr 4:4:4, 24 bit is supported. x.v.Color/3D/HDR/ARC/HEC/CEC are not supported.
		Format VGA / XGA / WXGA (1280x768) / WXGA (1280x800) / Quad-VGA / SXGA / WXGA (1360x768) / WXGA (1366x768) / SXGA+ / WXGA+ / WXGA++ / UXGA / WSXGA+ / VESAHD / WUXGA / QWXGA / WQHD / WQXGA For VESAHD / WUXGA / QWXGA / WQHD / WQXGA, only Reduced Blanking is supported. 480p / 576p / 720p / 1080i / 1080p / 4K (3840x2160) / 4K (4096x2160)
	Audio	Digital Multi-channel LPCM up to 8 channels Sampling frequency: 32 kHz to 192 kHz, Sample size: 16 bit to 24 bit Reference level: -20 dBFS, Max. output level: 0 dBFS
Connector		Female HDMI Type A (19-pin)
Maximum transmission distances		98 ft. (30 m) (1080p@60), 39 ft. (12 m) (4K@60) (*1)
Functions	Scan Converter	Motion adaptive interlaced/progressive conversion, Aspect ratio control, Picture adjustment (brightness, contrast, image position, image size, etc.), Seamless Switching
	Others	Videowall output, Lip Sync (Max. 256 ms.), Anti-snow, Connection Reset (*2)
General	Power consumption	About 41 Watts
	Weight	1.8 lbs. (0.8 kg)
	Temperature	Operating : 32°F to 104°F (0°C to +40°C) Storage : -4°F to +176°F (-20°C to +80°C)
	Humidity	Operating/Storage: 20% to 90% (Non Condensing)


*1 The maximum cable distance varies depending on the connected devices and was measured under following conditions:

- 1080p@60: When IDK's cable was used and signals of 1080p@60 24 bit/pixel (8 bit/component) was output.
- 4K@60 : When IDK's 18 Gbps supported cable was used and signals of 4K@60 24 bit/pixel (8 bit/component) was output.

The maximum cable distance depends on the connected devices. The distance may not be extended with some device combinations, cabling method, or other manufacturer's cable. Video may be disturbed or may not be output even if signals are within the range mentioned above.

*2 For digital systems, some problems, such as an HDCP authentication error, can often be recovered by physically disconnecting and reconnecting the digital cables. However, the Connection Reset feature will fix these problems automatically without the need to physically plug and unplug the cables. It creates the same condition as if the cable were physically disconnected and reconnected. This feature only works for the FDX-S's output. If other devices are connected between the FDX-S's output and sink device, this feature may be invalid.

■ Panel

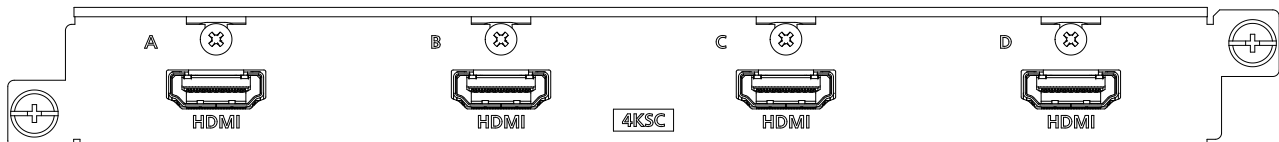

●All specifications and drawings are subject to change without notice. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●The terms Anti-snow and Connection Reset are registered trademarks of IDK Corporation in Japan. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified. ●©2026 IDK Corporation, all rights reserved.