


NP-SDI2HD is a simple converter which can convert SD/HD/3G-SDI signal to HDMI signal. Up/Down convert functions are installed. Input SDI signal can be reclocked and distributed to 2 SDI port as well. Maximum resolution for input is up to 3G-SDI and output is up to 1080p.

#### ■ Specifications

Model	NP-SDI2HD
Input	1 Input: SD/HD/3G-SDI (BNC)
Input resolutions	<ul style="list-style-type: none"> <li>● 3G-SDI               <ul style="list-style-type: none"> <li>➢ 1080p50/60</li> </ul> </li> <li>● HD-SDI               <ul style="list-style-type: none"> <li>➢ 1080p24/25/30</li> <li>➢ 1080i50/60</li> <li>➢ 720p50/60</li> </ul> </li> <li>● SD-SDI               <ul style="list-style-type: none"> <li>➢ 625i (PAL)</li> <li>➢ 525i (NTSC)</li> </ul> </li> </ul>
Output	1 Output: HDMI (Type-A) 2 Outputs: SD/HD/3G-SDI
Output resolutions	1080p@ 60 / 50, 1080i@ 60 / 50, 1080p@ 30 / 25 / 24, 720p@ 60 / 50, 525i, 625i
Audio	Embedded audio (2 ch, 24 bit, 48 kHz) ※SDI Embedded Audio Channel 1-2
Plug & Play	Yes
Dimensions	74 mm x 63.6 mm x 22 mm (Without projections)
Weight	180 g
Temperature	Operation: 0 to 50 degrees C      Storage: -20 to +60 degrees C
Humidity	Operation/Storage: 20 to 90 % (Without condensing)
Power consumptions	2.04W (12V, 170mA)
Accessories	DC power adapter with locking mechanism x 1

#### ■ Outside Design

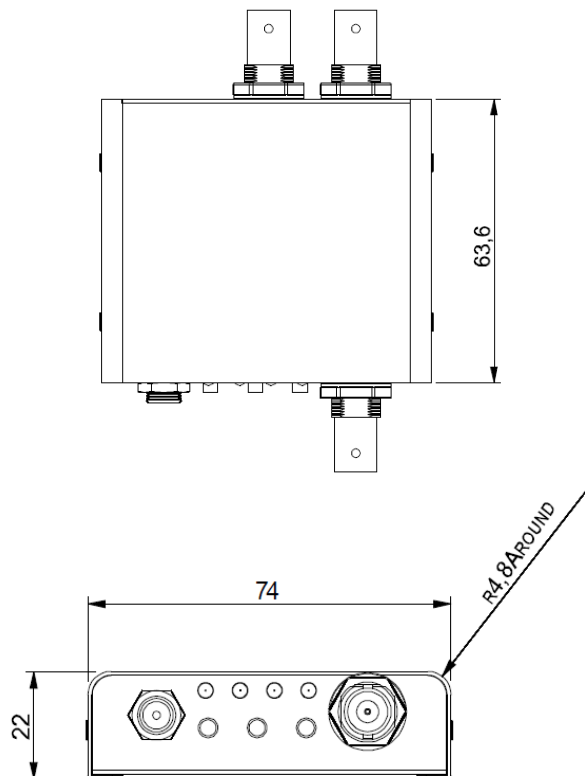

●Design and specifications may change without notice for further improvement. ●Attached DC adapter is designed for this product and shall not be used with other devices.