



The PD-S15 is a power distribution unit with 5 V and 12 VDC power.



By using a dedicated DC power cable (sold separately), the PD-S15 supplies power to up to 15 IDK products which operate via an AC adapter.

### ■ Specification

| Item            | Description  |   |
|-----------------|--|---|
| DC power output | 15 outputs<br>5 VDC, 3 A or 12 VDC, 5 A (Maximum distribution power: 230 W)<br>※For 150 W or more use, follow the maximum continuous operating hour and cooling requirement. |   |
| Function        | Overcurrent protection   |   |
| General         | Dimensions (Unit)  | 4.2 (W) × 2.4 (H) × 5.9 (D)" (106 (W) × 61 (H) × 150 (D) mm) (Excluding connectors and the like)                    |
|                 | Weight (Unit)  | 1.8 lbs. (0.8 kg)   |
|                 | AC adapter   | Input : 100 - 240 VAC ±10%, 50 Hz/60 Hz ±3 Hz<br>Output : DC 12 V 24 A 288.0 W (A dedicated AC adapter is provided) |
|                 | Dimensions (AC adapter)  | 4.6 (W) × 1.9 (H) × 10 (D)" (116 (W) × 47 (H) × 254 (D) mm) (Excluding connectors and the like)                     |
|                 | Weight (AC adapter)  | 3.5 lbs. (1.6 kg)   |
|                 | Power consumption  | About 6.5 W   |
|                 | Temperature  | Operating : 32°F to 104°F (0°C to +40°C)<br>Storage : -4°F to +176°F (-20°C to +80°C)                               |
| Humidity        | Operating/Storage: 20% to 90% (Non Condensing)   |   |

Do not use the supplied AC adapter for other devices.

### ■ Front & Rear Panels

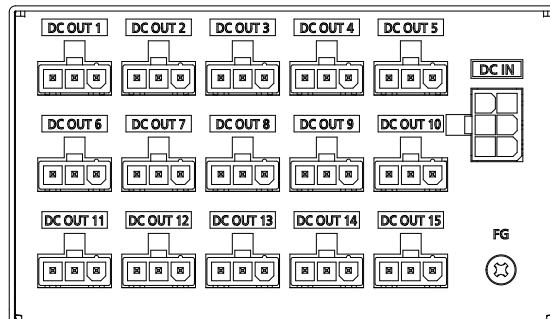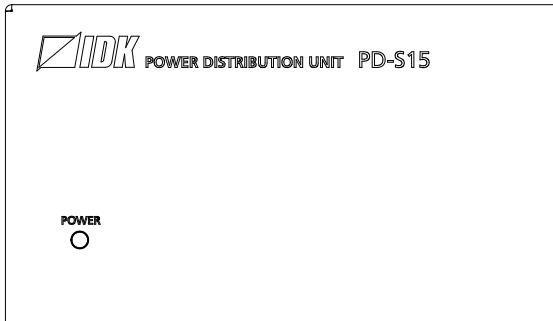

●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the "®" or "™" marks may not be specified. ●©2021 IDK Corporation, all rights reserved.